meridian 🙏

HID525 - Touch-Free Ice & Water Dispenser

Nugget Ice Machine / Dispenser

The Meridian * Difference

Sanitation

- Touch-free, infrared dispensing of ice and water eliminates the need to physically touch the dispenser for more sanitary operation
- AgION^{*} and other antimicrobial compounds are molded into key components to help inhibit the growth of microbes, bacteria, mold and algae
- Fully removable bin, spouts, air filter, sink, and grill allow for easy cleaning and maintenance
- Sealed refrigeration system minimizes outside airborne contamination
- Front accessible, removable air filter makes cleaning more convenient

Reliability & Ease of Use:

- Sealed, maintenance-free bearings reduce preventative maintenance and ensure maximum reliability
- Produces Scotsman's chewable HNugget Ice which is slow-melting and designed for reliable dispensing
- Space-maximizing design the industry's smallest operational footprint relative to capacity, featuring specially designed contoured sides for enhanced breathability
- SmoothStream water dispensing technology reduces splashing to keep the machine and surrounding areas clean
- Unit-specific QR code for quick access to service manuals and warranty history
- Durable stainless-steel evaporator and exterior panels, plus larger sink opening and dispensing area
- Enhanced service features Intuitive LED diagnostic lights reduce service time and convenient USB drive allows for fast software updates
- Industry-leading energy and water efficiency along with quieter operation






Sealed, maintenance-free bearings ensure maximum reliability and contribute to a long machine life

HID525A-1 with optional KLP24A legs







User controlled antimicrobial push-button dispensing option, providing quick and efficient operation

24 Hour Volume Production

Air		Water Cooled				
70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	70°F/21°C 50°F/10°C	Air Water	90°F/32°C 70°F/21°C	
500/227 lb/kg		365/166 lb/kg	500/227 lb/kg		400/181 lb/kg	_



Specifications

									water	rusage
Madel Candor			Storage			Max. Fuse Size		Energy Consumpti on	Gallon s/100 lb (liters/45.4 kg)	
ı	Model	Condenser	Dispensing	Capacity	Basic Electri cal	or HACR Circuit	Min. Circuit	kWh/100 lb	Potable	Conden ser
ı	Number	Unit	Method	lb/kg	Volts/Hz/Phase	Breaker (amps)	Amps	90°F(32°C)/70°F(21°C)	90°F(32°C	c)/70°F(21°C)
ı	HID525A-1	Air	Touch-Free Senso	or25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
ı	HID525AB-1	Air	Button Activated	25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
ı	HID525AW-1	* Air	Touch-Free Senso	or25/11.3	115/60/1	15	Cord	5.50	12/45.5	-
ı	HID525W-1	Water	Touch-Free Senso	or25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3
l	HID525WB-1	Water	Button Activated	25/11.3	115/60/1	15	Cord	4.30	12/45.5	120/454.3

*Wall mount configuration. Does not have or accept a drip tray. Unit designed to be installed over existing sink.



Chewable, slow-melting ice that allows for more reliable dispensing.



3/4" x 5/16" x 3/8" (1.9 x 0.8 x 0.95 cm)






- 3 years parts and labor.
- 5 years parts on the compressor and condenser.
- Warranty valid in North, South & Central America for commercial installations.
- Contact factory for warranty in other regions.
- Residential Applications: 1 year parts and labor




Without Wall Mount: HID525A(B) & HID525W(B)


Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.


All models include 7.5' power cord with NEMA 5-15P plug

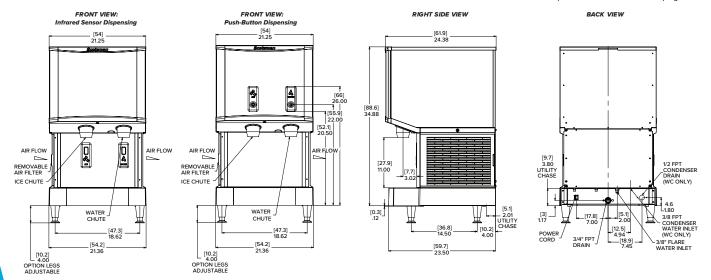

With Wall Mount: HID525AW









All Models

Dimensions (W \times D \times H):

Unit:

HID525A(B)-1: 21.25" x 24.38" x 35" HID525AW-1: 23.25" x 24.38" x 35" HID525W(B)-1: 21.25" x 24.38" x 35"

Shipping Carton:

HID525A(B)-1: 24.25 x 27.13 x 41.5 HID525AW-1: 24.25 x 27.13 x 41.5 HID525W(B)-1: 24.25 x 27.13 x 41.5

Shipping Weight:

HID525A(B)-1: 208 lb / 95 kg HID525AW-1: 213 lb / 97 kg HID525W(B)-1: 208 lb / 95 kg

BTUs per hour: 6,800

Refrigerant: R-404A

Accessories

Model Number	Description
KLP24A HST21-A HST21B-A	4" Adjustable legs, box of 4, plastic with metallic foot. Machine stand for HID525 and HID540, with locking reversible door and shell Machine stand for HID525 and HID540, basic version.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

	Minimu m	M aximu m	
Air Temperatures	50°F (10° C)	100° F (38°C)	
Water Temperatures	40°F (4.4°C)	100° F (38°C)	
Potable Water Pressures	20 PSG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-5%	+10 %	

Specifications and design are subject to change without notice.

